

# Quick Ship

In Stock and Ready to Ship



**six degrees**  
FLOORING SURFACES™



Premium  
build  
Made in  
the USA



## Quick Ship PROGRAM

The Quick Ship collection was created for the fast-paced project world, where finding the right product quickly is the highest priority. Available in both 2 mm/6 mil and 3 mm/20 mil options, we guarantee a minimum quantity of 25,000 SF in stock at all times. Why wait weeks for your flooring to arrive when you can have it now? With the Quick Ship Collection, you're just a few steps away from *the floor you need when you need it!*

you're



just



a



few



steps



away



# Quick Ship 2 mm Plank + Tile

# 3 mm Plank



QP217\_C09

Washy Oak




QP220\_C03

Natural Oak



QP233\_C62

European Oak

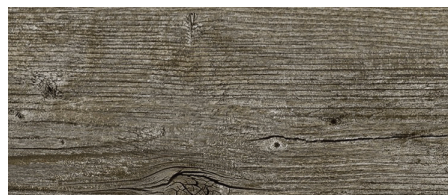

QP190\_C16E

Antique Pine



QP311\_C05

Weathered Pine



QP231\_C13

Classic Oak



QP251\_C12

Golden Oak



QT375\_C01

Simply Urban




QP324\_C05

Heritage Oak



QP190\_C16A

Antique Pine

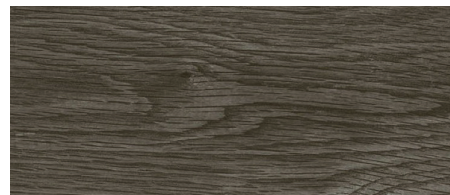

QP251\_C15

Modern Oak



QP195\_C20

Country Oak



QP182\_C05

Chestnut

2 MM

## QUICK SHIP 2 MM PLANK SPECIFICATIONS

Nominal Dimensions: 6" x 48" x 2 mm plank  
Finish: Embossed 6 mil  
Quantity Per Carton: 27 planks (6" x 48")  
Sq. Ft. Per Carton: 54 sq. ft./carton

2 MM

## QUICK SHIP 2 MM TILE SPECIFICATIONS

Nominal Dimensions: 18" x 18" x 2 mm tile  
Finish: Embossed 6 mil  
Quantity Per Carton: 24 tiles (18" x 18")  
Sq. Ft. Per Carton: 54 sq. ft./carton

## 2 MM / 3 MM FEATURES

- FloorScore® Certified
- Ceramic Reinforced UV-Cured Urethane Finish (3 mm only)
- Extremely Durable
- Excellent Indentation Resistance
- Excellent Chemical Resistance
- Excellent Slip Resistance
- 100% Recyclable



## 2 MM / 3 MM TEST INFORMATION

LEED v2009 MR Credit 6 RRM Content: 12%  
LEED v2009 IEQ Credit 4.1: Qualifies  
LEED v2009 IEQ Credit 4.3: Qualifies  
ASTM F 1700 – Solid Vinyl Tile: Class III, Type A & B  
ASTM E 648 – Critical Radiant Flux: Class I, >.45 W/cm2  
ASTM E 662 – Smoke Density: Passes, <450  
CAN/ULC-S102.2 – Surface Burning: 50 FSR, 150 SDC  
ASTM D 2047 – Slip Resistance: >0.60  
ASTM F 970 – Static Load Limit: Passes, > 250 PSI  
ASTM F 925 – Chemical Resistance: Excellent (chart available)  
ASTM F 1515 – Light Stability: Passes  
ASTM F 1914 Residual Indentation: Passes  
ASTM F2199 Dimensional Stability: Passes  
Acclimation Time: 48 Hours

## WARRANTY

- 2 mm – 10-Year Residential Warranty
- 3 mm – 15 Year Commercial Warranty

3 MM

## QUICK SHIP 3 MM PLANK SPECIFICATIONS

Nominal Dimensions: 6" x 48" x 3 mm plank  
Finish: Embossed 20 mil  
Quantity Per Carton: 18 planks (6" x 48")  
Sq. Ft. Per Carton: 36 sq. ft./carton



six degrees

FLOORING SURFACES™

931 South Springville Avenue • Fostoria, Ohio 44830 • 844-432-5885

For the most current and complete technical, installation and maintenance information, please visit [sixdegreesflooring.com](http://sixdegreesflooring.com)