

DeGradus™  
VINYL FLOORING



six degrees  
FLOORING SURFACES™



Premium  
build  
Made in  
the USA



## ○ DeGradus™ COLLECTION

Created with the apartment and multi-family community in mind, DeGradus™ offers a range of wood and stone visuals in a variety of colors and textures... perfect for high wear residential applications. Proudly produced in the USA, DeGradus™ is as beautiful as it is durable, cost effective, and readily available for fast turnaround times. The look you want with the price you need... you're just a few steps away from *the value and versatility of DeGradus™ Vinyl Plank and Tile.*

you're



just



a



few




steps




away



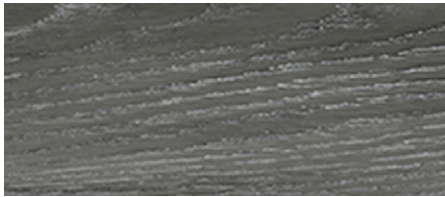


DP233\_C19 Covington

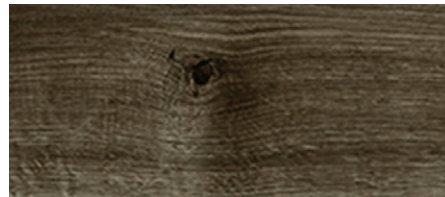


DP231\_C42 Martin Classic



DT362\_C01 Savannah Slate

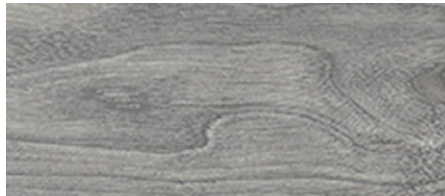

DP188\_C29 Gleason Gray

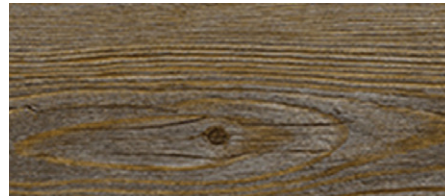

DP190\_C06 Parsons Plank



DT362\_C10 Selmer Slate



DP232\_C01 Waverly White




DP231\_C07 Jackson Classic



DT363\_C01 Camden Concrete



DP350\_C02 Trenton Tan

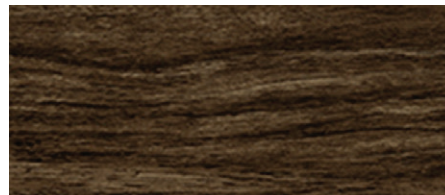

DP174\_C16 Rutherford



DP174\_C09 Huntingdon



DP188\_C14 Newbern Natural



**six degrees**  
FLOORING SURFACES™

931 South Springville Avenue • Fostoria, Ohio 44830

**844-432-5885**

## Technical

### FEATURES

- Easy to Maintain
- Qualifies for LEED® Credits
- FloorScore® Certified
- UV-Cured Urethane Finish
- Extremely Durable
- Excellent Indentation Resistance
- Excellent Chemical Resistance
- Excellent Slip Resistance
- 100% Recyclable



CERTIFIED BY  
SCS Global Services



### WARRANTY

- 10-Year Residential/Multi-Family Warranty

### DEGRADUS™ PLANK SPECIFICATIONS

Nominal Dimensions: 6" x 48" x 2 mm plank  
Finish: Embossed 7 mil  
Quantity Per Carton: 27 planks (6" x 48")  
Sq. Ft. Per Carton: 54 sq. ft./carton

### DEGRADUS™ TILE SPECIFICATIONS

Nominal Dimensions: 12" x 24" x 2 mm tile  
Finish: Embossed 7 mil  
Quantity Per Carton: 22 tiles (12" x 24")  
Sq. Ft. Per Carton: 44 sq. ft./carton

### TEST INFORMATION

ASTM F 1700 – Solid Vinyl Tile: Class III, Type A & B  
ASTM E 648 – Critical Radiant Flux: Class I, >.45 W/cm<sup>2</sup>  
ASTM E 662 – Smoke Density: Pass  
ASTM D 2047 – Slip Resistance: > 0.60  
ASTM F 970 – Static Load Limit: 250 PSI, < .005" Indentation  
ASTM F 925 – Chemical Resistance: Excellent (chart available)  
ASTM F 1515 – Light Stability: Pass

For the most current and complete technical, installation and maintenance information, please visit [sixdegreesflooring.com](http://sixdegreesflooring.com)

