

VaraCore™

VINYL PLANK



six degrees
FLOORING SURFACES™



Yellowstone
VP400_C13



Yukon
VP312_C04

Potomac
VP233_C08



○ VaraCore™ VINYL PLANK

VaraCore™ by Six Degrees is a rigid core vinyl product consisting of 15 natural wood looks, making it a beautiful and sustainable flooring option that can be installed directly over a variety of substrates without the need for adhesive. The wear layer enhanced with our UV-cured ceramic-reinforced polyurethane finish provides maximum durability and long-lasting beauty without the use of an on-site finish. Our core provides greater compression strength and no glues, making it a stronger and more environmentally friendly option over standard WPC options. ***Beauty and strength combined in one easy to install package ...*** VaraCore from Six Degrees.

you're just a few steps away



VaraCore™ Planks • 7-1/4" x 47-3/4"



VP312_C38 Rio Grande



VP401_C23 Ottawa



VP312_C04 Yukon



VP401_C22 Colorado



VP401_C20 Cumberland



VP312_C35 Hudson



VP401_C21 Tennessee



VP312_C37 Mississippi



VP233_C08 Potomac




VP233_C02 Ohio




VP233_C05 Saginaw



VP400_C13 Yellowstone

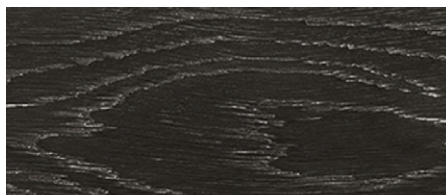

VP233_C19 Kettle

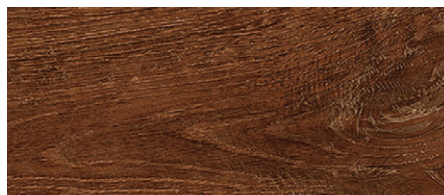

VP312_C36 Cimarron



VP400_C14 Platte

Technical

FEATURES

- Easy to Maintain
- FloorScore® Certified
- Ceramic Reinforced UV-Cured Finish
- Excellent Indentation Resistance
- Excellent Slip Resistance
- Excellent Chemical Resistance
- More Durable Than WPC – Much Less Brittle And Higher Compression Strength
- More Stable Than WPC – Better Stability Against Temperature Changes
- Supreme Moisture Resistance
- Less Floor Undulation Caused By Uneven Surface/Subfloor Imperfections
- More Eco-Friendly – Unlike WPC, There Is No Glue In Our Core, Ensuring Low VOCs



WARRANTY

- 15-Year Residential/Multi-family Warranty
- 5-Year Limited Commercial Warranty

VARACORE™ PLANK SPECIFICATIONS

Nominal Dimensions: 7-1/4" x 47-3/4" x 4 mm plank

Finish: Embossed 12 mil

Quantity Per Carton: 10 planks

Sq. Ft. Per Carton: 24.22 sq. ft./carton

TEST INFORMATION

ASTM F 3261 – Class I, Type B, Backing Class A

Meets or exceeds recommendations

ASTM E 648 – Critical Radiant Flux: Class I, >.45 W/cm²

ASTM E 662 – Smoke Density: Pass

ASTM D 2047 – Slip Resistance: > 0.60

ASTM F 970 – Static Load Limit: Pass

ASTM F 925 – Chemical Resistance: Excellent (chart available)



six degrees
FLOORING SURFACES™

931 South Springville Avenue • Fostoria, Ohio 44830

844-432-5885

For the most current and complete technical, installation and maintenance information, please visit sixdegreesflooring.com